

Stainless Steel Cable Ties 不銹鋼扎帶

Stainless Steel Ball Lock Ties 珠式不銹鋼扎帶

Description

The roller-ball type ties have a non-releasable locking mechanism that offers infinite adjustment along the length of the tie. These ties are available in both 316 and 304 grades of stainless steel.

Operating Temperature: -80°C to 538°C

Application

The range of stainless steel ties are suitable for use in the most arduous conditions or where additional security, strength, fire resistance and chemical resistance properties. Used in all industries - from mass transit, ship building, oil rigs, mining, chemical industries and many more.



Available Size

Part No. 货号	Item Code 型号	Length (L) 长度	Width (W) 宽度	Thickness (T) 厚度	Maxi Bundle Diameter 最大捆扎范围	Min. Tensile Strength 最小拉力
		mm	mm	mm	mm	Kg
6700	RB-100S	100	4.6	0.25	23	60
6701	RB-150S	150	4.6	0.25	37	60
6702	RB-200S	200	4.6	0.25	50	60
6703	RB-250S	250	4.6	0.25	63	60
6704	RB-300S	300	4.6	0.25	76	60
6705	RB-460S	460	4.6	0.25	115	60
6706	RB-500S	500	4.6	0.25	128	60
6707	RB-200LH	200	7.9	0.25	50	80
6708	RB-250LH	250	7.9	0.25	63	80
6709	RB-300LH	300	7.9	0.25	76	80
6710	RB-400LH	400	7.9	0.25	102	80
6711	RB-200H	200	10.0	0.25	50	120
6712	RB-250H	250	10.0	0.25	63	120
6713	RB-300H	300	10.0	0.25	76	120
6714	RB-400H	400	10.0	0.25	102	120
6715	RB-500EH	500	12.0	0.25	128	150
6716	RB-600EH	600	12.0	0.25	154	150
6717	RB-700EH	700	12.0	0.25	180	150
6718	RB-800EH	800	12.0	0.25	193	150

Note: Special size could customized

Properties of 304/316 steel

Material	Chem. Material Properties	Operating Temperature	Flammability	Operating Temperature
Stainless Steel Type SS304	Corrosion resistant Weather resistant Outstanding chemical resistance Antimagnetic	-80°C to 538°C	Halogen free	
Stainless Steel Type SS316	Salt spray resistant Corrosion resistant Weather resistant Outstanding chemical resistance Antimagnetic	-80°C to 538°C	Halogen free	
The Tie		Coating		
Stainless Steel Type SS316 coated with Polyester	Salt spray resistant Corrosion resistant Weather resistant Outstanding chemical resistance Antimagnetic	-80°C to 538°C	Halogen free	-50°C to 150°C
Stainless Steel Type SS316 coated with Nylon	Salt spray resistant Corrosion resistant Weather resistant Outstanding chemical resistance Antimagnetic	-80°C to 538°C	Halogen free	-40°C to 85°C




The Item code Construction:

Uncoated Ties
SS 304 Material: RB-130S
SS 316 Material: RBS-130S

Semi Coated Ties
SS 304 Material: RB-130SC
SS 316 Material: RBS-130SC

Fully Coated Ties
SS 304 Material: RB-130SFC
SS 316 Material: RBS-130SFC



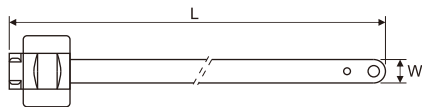

Stainless Steel Cable Ties

Stainless Steel Cable Ties 不銹鋼扎帶

Releasable SS Cable Tie 可鬆式不銹鋼扎帶

Features

This ties have greater flexibility as it can Fasten-Unfasten-Refasten as per usage. Coated ties are used for added resistance to corrosion and weathering effect.

Operating Temperature: -80°C to 150°C (Coated) [Material Specification pls see page 28]

Available Size

Part No. 货号	Item Code 型号	Length (L) 长度	Width (W) 宽度	Thickness 厚度	Mini Tensile Strength 最小拉力	Maxi Bundle Diameter 最大捆扎范围
		mm	mm	mm	Kg	mm
6760	RS-150S	150	9.5	0.4	100	33
6761	RS-190S	190	9.5	0.4	100	46
6762	RS-250H	250	9.5	0.4	100	65
6763	RS-300H	300	9.5	0.4	100	81
6764	RS-350H	350	9.5	0.4	100	97
6765	RS-400H	400	9.5	0.4	100	113
6766	RS-450H	450	9.5	0.4	100	129
6767	RS-490H	490	9.5	0.4	100	141
6768	RS-550H	550	9.5	0.4	100	161
6769	RS-600H	600	9.5	0.4	100	176
6770	RS-650H	650	9.5	0.4	100	192
6771	RS-700H	700	9.5	0.4	100	208

Stainless Steel Free End Clamp 自由式不銹鋼束帶

Features

- Power solution to seal between the hose and transmission shaft. Bundle diameters can be adjusted to needs.
- Strong, durable method of fastening and bundling.
- The bundle diameter can be adjusted before fastened. The additional ears can be bent over to increase tensile strength.
- Stainless steel type: 304, 316
- All lengths available

Available Size

Part No. 货号	Item Code 型号	Length (L) 长度	Width (W) 宽度	Thickness 厚度	Maxi Bundle Diameter 最大捆扎范围	Min. Tensile Strength 最小拉力
		mm	mm	mm	mm	kg
6800	FEC-200H	200	12	0.3	47	120
6801	FEC-300H	300	12	0.3	79	120
6802	FEC-400H	400	12	0.3	110	120
6803	FEC-500H	500	12	0.3	140	120
6804	FEC-300E	300	15	0.3	78	150
6805	FEC-400E	400	15	0.3	110	150
6806	FEC-500E	500	15	0.3	140	150
6807	FEC-600E	600	15	0.3	175	150
6808	FEC-800E	800	15	0.3	235	150
6809	FEC-500EH	500	19	0.4	141	200
6810	FEC-600EH	600	19	0.4	154	200
6811	FEC-800EH	800	19	0.4	193	200



Stainless Steel Cable Ties 不銹鋼扎帶



Ladder Type SS Cable Tie 梯式不銹鋼扎帶

Features

- Strong self-locking mechanism (pawl and ratchet), requires no time consuming crimping or folding operations.
- Flat and low profile head (no sharp edge), for easy installation.
- Corrosion resistant 316 grade stainless steel (marine grade) for high mechanical and chemical durability.
- Uncoated version for high temperature applications.
- Increased usable length (slots up to the end of the tail), allows larger bundle diameters with the same tie length.
- Larger slot at the end, allows the use of a hook-type tool.

Available Size

Part No. 货号	Item Code 型号	Length 长度	Width 宽度	Mini Tensile Strength 最小拉力	Maxi Bundle Diameter 最大捆扎范围
		mm	mm	Kg	mm
6830	LS-150S	150	7.0	110	33
6831	LS-225S	225	7.0	110	57
6832	LS-300S	300	7.0	110	81
6833	LS-335S	335	7.0	110	92
6834	LS-400S	400	7.0	110	113
6835	LS-450S	450	7.0	110	129
6836	LS-490S	490	7.0	110	141
6837	LS-550S	550	7.0	110	161
6838	LS-600S	600	7.0	110	176
6839	LS-650S	650	7.0	110	192
6840	LS-700S	700	7.0	110	208
6841	LS-750S	750	7.0	110	224
6842	LS-800S	800	7.0	110	240
6843	LS-450H	450	12.0	180	129
6844	LS-490H	490	12.0	180	141
6845	LS-550H	550	12.0	180	161
6846	LS-600H	600	12.0	180	176
6847	LS-650H	650	12.0	180	192
6848	LS-700H	700	12.0	180	208
6849	LS-750H	750	12.0	180	224
6850	LS-800H	800	12.0	180	240

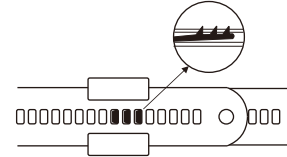

Stainless Steel Marker Plates 不銹鋼標誌牌

Features

The Stainless Steel Marker Plates can be used to identify pipes, conduit, valves, cables and equipment in petrochemical plants, pulp and paper mills, refineries, offshore oil rigs and in many other harsh environments. It is designed to work with Rollerball or Ladder Type S.S. Ties to provide the ultimate permanent identification solution.

Available Size

Part No. 货号	Item Code 型号	Specification 尺寸	Thickness 厚度	Part No. 货号	Item Code 型号	Specification 尺寸	Thickness 厚度
		mm	mm			mm	mm
6890	MP-9.5x50	9.5x50	0.4	6893	MP-19x50	19x50	0.4
6891	MP-9.5x90	9.5x90	0.4	6894	MP-19x90	19x90	0.4
6892	MP-15x110	15x110	0.4	6895	MP-19x110	19x110	0.4






Stainless Steel Cable Ties

Stainless Steel Cable Ties 不銹鋼扎帶

Naked Stainless Steel Cable Tie Disc 白鋼不銹鋼盤帶

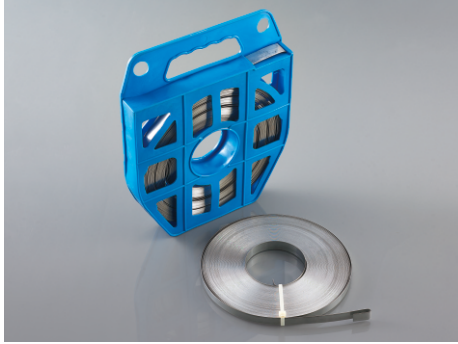

Features

- The SS ties have an unique ball locking mechanism that allow easily and quickly installed and.
- Stainless steel type: 304 or 316
- 25M / 30M length per disc
- Special lengths are available for customized.

Part No. 货号	Item Code 型号	Width 宽度	Thickness 厚度	Range of applications 应用范围
		mm	mm	
6900	STD-0638	6.4	0.38	Number plate, a small attachment fixed, cable wires bundled 捆綁號碼牌, 小型固定附件, 電纜
6901	STD-0938	9.5	0.38	Number Cards, billboards, cable wire bundling 捆綁號碼卡, 廣告牌, 電纜
6902	STD-1040	10	0.4	Small billboards fixed junction box, pipe insulation strapping 捆扎小型廣告牌固定接線盒, 管道隔熱纏繞帶
6903	STD-1340	12.7	0.4	Insulation pipes, cables, signal boxes, small control box 固定絕緣管道, 電纜, 信號盒和小型控制箱
6904	STD-1640	16	0.4	Small road signs, cables, thin-walled hose fixed 固定小型公路信號燈, 電纜, 薄壁軟管
6905	STD-1940	19	0.4	Mast objects, hoses and flange connection 船桅杆, 軟管和法蘭的连接
6906	STD-1376	12.7	0.76	Objects such as junction boxes, poles and signal box is fixed 固定接線盒, 電線杆和信號箱
6907	STD-1676	16	0.76	Bundled installation of pipe connections and the general objects 捆扎固定管道的连接处
6908	STD-1970	19	0.7	Fixed pipelines, power facilities, poles, equipment boxes installed 固定管道, 電力設施, 電線杆和设备控制箱
6909	STD-1976	19	0.76	Fixed bundle of heavy objects, lights and signs fixer 固定重物, 燈和信號燈



Stainless Steel Buckle 不銹鋼搭扣

Available Size

Type	Size				
	8mm	10mm	12.7mm	16mm	19mm
L Type	L-8	L-10	L-13	L-16	L-19
O Type	/	/	O-13	O-16	O-19

